


9971515-1 diplexer	
frequency band	2400-2485 MHz 5470-5725 MHz (5150-5875 MHz extended)
insertion loss	0.37 dB (2.4 GHz) 1.25 dB (5 GHz)
return loss (COM)	>22 dB (2.4 GHz) >15 dB (5 GHz)
weight	57 g
material	box precision milled alu 6082 screws A4-80
connectors	3 x SMA also available with fixed length LowLoss cables

note: preliminary data, in production aug 2013

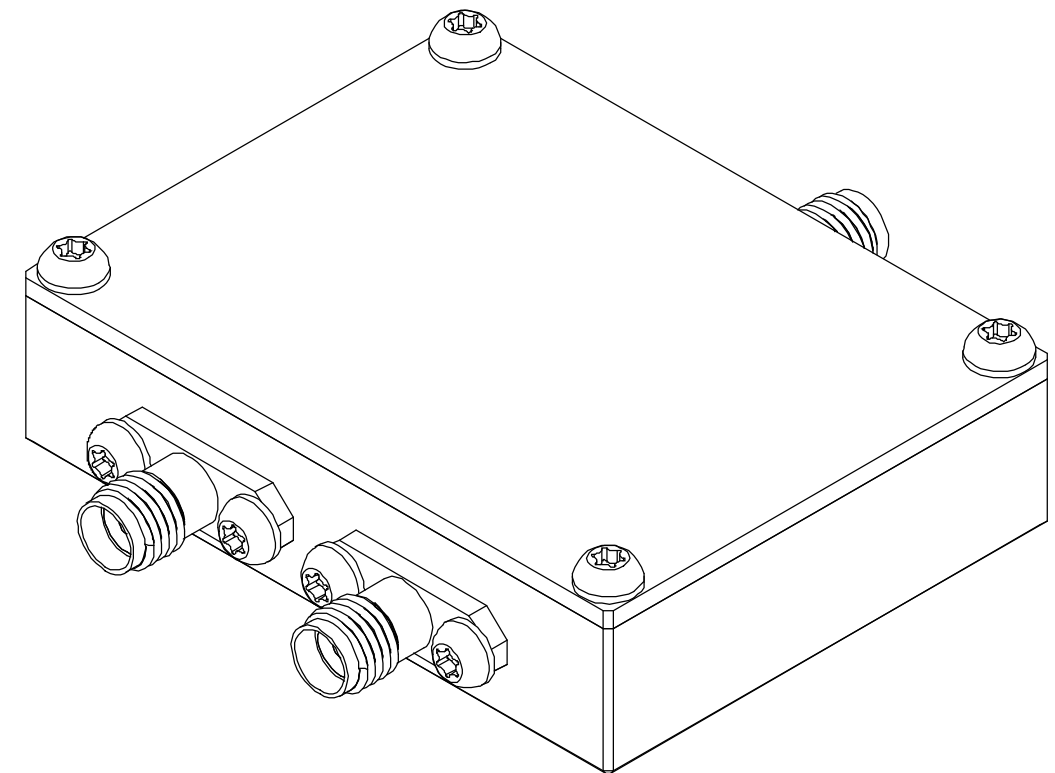

Konstruerad av NG	Granskad av	Datum 2013-06-17	Ritningsnummer 9971515-1-1	Generell tolerans ±0.1	Generell yt-jämnhet, Ra	Vyplacering	Skala 2:1
Ägare			Titel/Benämning diplexer				
RADIOLAGET				Material aluminium	Utgåva 1	Blad	